

FACTORY DIRECT RETAIL CATALOG



Free Shipping on Orders of \$100 or More. See page 3 for details.



In 1972, AMSOIL set all-new standards for motor oil quality when we introduced the world's first synthetic motor oil to meet American Petroleum Institute (API) service requirements. Today, we remain steadfast in our commitment to quality and precision lubricant engineering.

Our state-of-the-art mechanical testing laboratory allows us to stay on the cutting edge of lubricant technology. Equipped with three 480-sq. ft. dynamometer cells capable of housing a minimum of two dynamometers each, the facility allows us to test motor oil performance on-site, allowing quick turn-around times, the ability to modify conditions to measure different oil properties and unique testing not available elsewhere.



*All trademarked images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use. All products advertised here are developed by AMSOIL for use in the applications shown.

TO ORDER – Call 1-800-956-5695, 7 a.m. to 7 p.m. Central Time, M – F Free Shipping on Orders of \$100 or More (except in Alaska and Hawaii)

TWO WAYS TO SAVE

Free Shipping Buy Wholesale

1. FREE SHIPPING. Order \$100 or more in AMSOIL products and receive free ground shipping anywhere in the contiguous U.S.

2. BUY WHOLESALE/RECEIVE EXCLUSIVE PROMOTIONS. Become a Preferred Customer and save approximately 25 percent on each order. You'll pay regular AMSOIL shipping rates, but still save more on all orders for

the duration of your P.C. membership. You'll also receive exclusive product and freight promotions, free gear, points on purchases and referral rewards. You can register as a P.C. over the phone using the referral number from the back page of this catalog (if one is listed). A six-month trial membership is \$10. Memberships can be renewed for as little as \$15 annually.

TECHNICAL QUESTIONS

Direct all technical questions to the AMSOIL Technical Services Department at (715) 399-8324 or tech@amsoil.com.

AMSOIL WARRANTY STATEMENT

The use of AMSOIL products will not cause mechanical damage to any mechanically sound equipment when AMSOIL products are used in full compliance with AMSOIL recommendations and instructions. For full warranty statement see www.amsoil.com/warranty.aspx.

SHIPPING AND HANDLING

Continental U.S. - Customers receive free shipping on orders of \$100 or more. Orders less than \$100 are charged a flat shipping fee of \$8.50. Free standard ground shipping on orders of \$100 or more is valid only for catalog orders shipped to a valid address in the continental United States. AMSOIL does not ship to PO Boxes. The \$100 threshold does not include taxes, fees or other charges. AMSOIL reserves the right to cancel any order due to unauthorized, altered or ineligible use of this offer and to modify or cancel this offer at any time. No price adjustments will be provided on previous purchases. AMSOIL Dealers, Preferred Customers and accounts are ineligible for free shipping.

Alaska – Add 7.5 percent to product prices for extra freight expenses. Additional freight charges will be applied based on destination within Alaska and total order weight. See Shipping Info at www.amsoil.com for additional details.

Hawaii – Orders are shipped using the most cost-effective method and actual freight charges will be applied when orders are shipped. See Shipping Info at www.amsoil.com for additional details.

Military Post Boxes – AMSOIL INC. ships orders to APO and FPO addresses for customers' personal use only. Orders are shipped using U.S. Mail Parcel Post and orders will be charged actual freight costs, which will be charged at the time the order is shipped. See Shipping Info at www.amsoil.com for additional details.

NOTE: In-stock items are typically delivered within five business days. AMSOIL products cannot be shipped to post office boxes.

PRODUCT DAMAGED DURING SHIPPING

If there is visible damage to your order upon delivery, refuse the order. It will be returned to AMSOIL INC. for inspection and a new order will be sent at no extra charge to you. If you discover hidden damage after accepting delivery of your order, call 1-800-956-5695 for damaged product instructions.


SALES TAX INFORMATION

AMSOIL INC. is required to collect state, city, county and other taxes. AMSOIL also collects any additional taxes on lubricating products required by certain states.

NOTE: Freight charges, when shipped by common carrier, are exempt from sales tax in Colorado, Florida, Idaho, Iowa, Massachusetts, Oklahoma, Utah and Wyoming.

Prices subject to change without notice.

WANT MORE? Become an AMSOIL Dealer. AMSOIL products are sold through independent Dealers and we are currently seeking hard-working people to join our Dealer network. We offer plenty of support. There are no quotas to fill and no inventory requirements. This opportunity is available to you for less than \$50. New customers call 1-800-956-5695 and order a free Dealer/Preferred Customer Information Packet for information on AMSOIL Preferred Customer and Dealership opportunities.

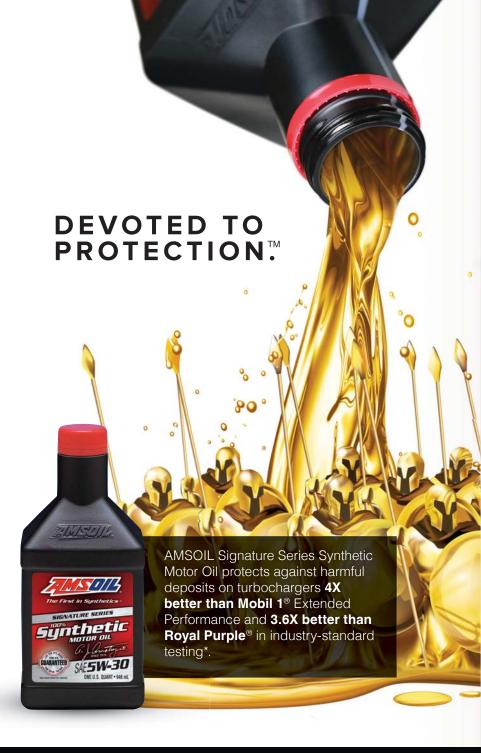



ynthetic OW-30

ATM

AMR

SE5W-50

5W-20

ASL

19/1/3

SE5W-30

AZF

unthetic



SIGNATURE SERIES SYNTHETIC MOTOR OIL

Engineered to outperform competitive conventional and synthetic motor oils and deliver maximum performance and protection throughout drain intervals of up to 25,000 miles/700 hours of operation/one year (normal service) in all types of automotive gasoline engines.

of automotive	e gasoline e	engines.		
OW-20 STOCK# ASMQT ASMQT ASM1G ASM1G	UNITS EA CA EA CA	PKG./SIZE 1 Quart 12 Quarts 1 Gallon 4 Gallons	WT.LBS. 2.1 25.2 7.9 31.6	COST 12.45 147.75 48.80 193.35
● 5W-20 STOCK# ALMQT ALMQT ALM1G ALM1G	UNITS EA CA EA CA	PKG./SIZE 1 Quart 12 Quarts 1 Gallon 4 Gallons	WT.LBS. 2.1 25.2 7.9 31.6	cost 12.05 142.95 47.15 186.90
OW-30 STOCK# AZOQT AZOQT AZO1G AZO1G	UNITS EA CA EA CA	PKG./SIZE 1 Quart 12 Quarts 1 Gallon 4 Gallons	WT.LBS. 2.1 25.2 7.9 31.6	COST 12.45 147.75 48.80 193.35
STOCK# ASLQT ASLQT ASL1G ASL1G	UNITS EA CA EA CA	PKG./SIZE 1 Quart 12 Quarts 1 Gallon 4 Gallons	WT.LBS. 2.0 24.0 7.6 30.4	COST 12.05 142.95 47.15 186.90
TOW-30 STOCK# ATMQT ATMQT ATM1G ATM1G	UNITS EA CA EA CA	PKG./SIZE 1 Quart 12 Quarts 1 Gallon 4 Gallons	WT.LBS. 2.1 25.2 7.9 31.6	COST 12.05 143.05 47.20 187.00
• 0W-40 STOCK # AZFQT AZFQT • 5W-50	UNITS EA CA	PKG./SIZE 1 Quart 12 Quarts	WT. LBS. 2.1 25.2	cos t 12.45 147.75
STOCK # AMRQT AMRQT	UNITS EA CA	PKG./SIZE 1 Quart 12 Quarts	WT. LBS. 2.1 25.2	COST 12.45 147.80

^{*}Based on independent, third-party testing of AMSOIL® Signature Series 5W-30, Mobil 1® Extended Performance 5W-30 and Royal Purple® API 5W-30 in the ASTM D6335 bench test required by the API SN Resource Conserving specification. For full test details visit www.amsoil.com/depositprotection.



Boosted additive technology maintains maximum wear protection for up to 10,000-mile/six-month drain intervals, or longer when recommended in owners' manuals or indicated by oil life monitoring systems. Save time, money and effort.

0W-2	0				[(10W-	30			
STOCK# XLZQT XLZQT XLZ1G XLZ1G	UNITS EA CA EA CA	PKG./SIZE 1 Quart 12 Quarts 1 Gallon 4 Gallons	WT.LB\$. 2.0 24.0 7.8 31.2	9.15 107.75 34.45 140.00		STOCK# XLTQT XLTQT XLT1G XLT1G	UNITS EA CA EA CA	PKG./SIZE 1 Quart 12 Quarts 1 Gallon 4 Gallons	WT.LBS . 2.1 25.2 7.8 31.2	9.15 107.85 35.50 140.10
● 5W-20	D				(0 10W-	40			
STOCK# XLMQT XLMQT XLM1G XLM1G	UNITS EA CA EA CA	PKG./SIZE 1 Quart 12 Quarts 1 Gallon 4 Gallons	WT.LB\$. 2.0 24.0 7.8 31.2	9.15 107.80 35.45 140.05		STOCK# XLOQT XLOQT XLO1G XLO1G	UNITS EA CA EA CA	PKG./SIZE 1 Quart 12 Quarts 1 Gallon 4 Gallons	WT.LBS. 2.0 24.0 7.8 31.2	9.15 107.85 35.50 140.15
5W-3	0									
STOCK# XLFQT XLFQT XLF1G	UNITS EA CA EA	PKG./SIZE 1 Quart 12 Quarts 1 Gallon	WT.LBS. 2.0 24.0 7.8	9.15 107.80 35.45						

^{*}All trademarked images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use. All products advertised here are developed by AMSOIL for use in the applications shown.



XLF1G

CA

4 Gallons

31.2



AMSOIL-engineered for today's sophisticated engines. Advanced synthetic technology resists chemical breakdown for maximum wear protection (and peace of mind) for the longer drain intervals established by vehicle manufacturers.

	_			
STOCK# OEZQT	UNITS EA	PKG./SIZE 1 Quart	WT.LBS . 2.0	COST 7.45
OEZQT OEZ1G	CA EA	12 Quarts 1 Gallon	24.0 8.0	87.75 29.05
0EZ1G ● 5W-2 (CA D	4 Gallons	32.0	114.40
STOCK# OEMQT OEMQT OEM1G OEM1G	UNITS EA CA EA CA	PKG./SIZE 1 Quart 12 Quarts 1 Gallon 4 Gallons	WT.LBS. 2.0 24.0 7.8 31.2	7.45 87.80 29.05 114.45
5W-3 0	-			
STOCK# OEFQT OEFQT OEF1G OEF1G	EA CA EA CA	PKG./SIZE 1 Quart 12 Quarts 1 Gallon 4 Gallons	WT.LBS. 2.0 24.0 7.8 31.2	7.45 87.80 29.05 114.45
10W- 3	30			
STOCK# OETQT	UNITS EA	PKG./SIZE 1 Quart	WT.LBS . 2.0	cost 7.45

12 Quarts

OETQT

CA

Tough-to-reach fill hole? Order a flexible pour spout with your oil to make the job easier. Fits quarts and gallons. STOCK# COST G1230 0.80



87.85

24.0

PREMIUM PROTECTION FOR EUROPEAN VEHICLES

Emissions System Protection

AMSOIL European Car Formula features precisely balanced formulations that consider the needs of modern exhaust treatment devices. It is important to use an oil that meets the proper specification to ensure optimum engine protection and performance.



European Car Formula Synthetic Motor Oil

Specially formulated for the lubrication needs of European gasoline and diesel cars and light trucks.

Designed for the specific demands of European gas and diesel engines.

- Outstanding All-Season Performance
- Engineered for Maximum Fuel Economy
- Enhanced Turbocharger Protection



EUROPEAN CAR FORMULA



European Car Formula 5W-30 Improved Emissions System Protection Synthetic Motor Oil

Manufacturer Approvals: VW 504.00/507.00
Use in vehicles that require API SN • ACEA C3 • GM
dexos2™ • Chrysler MS-11106 • MB 229.51 • BMW LL-04
• Porsche C30

STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
AELQT	EA	1 Quart	2.1	12.95
AELQT	CA	12 Quarts	25.2	153.55
AEL1G	EA	1 Gallon	8.0	50.70
AEL1G	CA	4 Gallons	32.0	201.00

European Car Formula 5W-40 Improved Emissions System Protection Synthetic Motor Oil

Manufacturer Approvals: BMW Longlife-04 • MB-Approval 229.51 • Porsche A40
Use in vehicles that require ACEA C3 • API SN/SM/CF...

Ose in vericies mat require ACLA C3 • API SN/SM/CF...
 Chrysler MS-10850 (supersedes MS-10896) • Ford
WSS-M2C917-A • GM dexos2™ (supersedes LL-A-025
 and LL-B-025) • Renault RN0700/RN0710 • Volkswagen
502.00/505.01

STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
AFLQT	EA	1 Quart	2.1	11.60
AFLQT	CA	12 Quarts	25.2	137.15
AFL1G	EA	1 Gallon	8.0	45.20
AFL1G	CA	4 Gallons	32.0	179 15

European Car Formula 0W-40 Classic Emissions System Protection Synthetic Motor Oil

Use in vehicles that require ACEA A3/B3, A3/B4 • API SN/ SM... • BMW LL-01 • MB 229.3/229.5 • Porsche A40 • Renault 0710, 0700 • VW 502,00/505,00

STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
EFOQT	EA	1 Quart	2.1	11.25
EFOQT	CA	12 Quarts	25.2	132.85

European Car Formula 5W-40 Classic Emissions System Protection Synthetic Motor Oil

Manufacturer Approvals: MB-Approval 229.5 • Porsche A40 • VW 502.00/505.00

Use in vehicles that require ACEA A3/B3, A3/B4 • API SN/SM... • BMW LL-01 • Renault 0710, 0700

STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
EFMQT	EA	1 Quart	2.1	8.85
EFMQT	CA	12 Quarts	25.2	104.15
EFM1G	EA	1 Gallons	8.0	34.50
EFM1G	CA	4 Gallons	32.0	136.25

BUILD IT.

CRUISE IT.





O Assembly Lube

Formulated to cling to engine parts and provide exceptional wear protection in newly built or rebuilt high-performance, racing and other four-stroke engines.

STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
EALTB	EA	(1) 4-oz. Tube	0.3	8.95
EALTB	CA	(12) 4-oz. Tubes	3.6	105.75

Break-In Oil

Allows for quick and efficient piston ring seating in new and rebuilt high-performance and racing engines.

STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
BRKQT	EA	1 Quart	2.1	8.75
BRKQT	CA	12 Quarts	25.2	103.60

Z-ROD® Synthetic Motor Oil

High-zinc, high-phosphorus formulation engineered specifically for classic cars and performance vehicles.

10W-30

STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
ZRTQT	EA	1 Quart	2.1	11.60
ZRTQT	CA	12 Quarts	25.2	137.75
_				

■ ∠ U₩-5U						
STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST		
ZRFQT ZRFQT	EA CA	1 Quart 12 Quarts	2.1 25.2	12.05 142.85		

*All trademarked images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use. All products advertised here are developed by AMSOIL for use in the applications shown.





DOMINATOR® Synthetic Racing Oil

Superior performance and maximum protection in high-performance and racing applications.

● 5W-	20			
STOCK	# UNITS	PKG./SIZE	WT.LBS.	COST
RD200	QT EA	1 Quart	2.0	13.75
RD200	QT CA	12 Quarts	24.0	163.20
• 10W STOCK		PKG./SIZE	WT.LBS.	COST

RD20QT	CA	12 Quarts	24.0	163.20
10W-30) Units	PKG./SIZE	WT.LBS.	COST
RD30QT	EA	1 Quart	wi.lbs. 2.0	13.75
RD30QT	CA	12 Quarts	24.0	163.25

15W-5	J			
STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
RD50QT	EA	1 Quart	2.1	14.40
RD50QT	CA	12 Quarts	25.2	171.35
RD501G	EA	1 Gallon	8.0	56.60
RD501G	CA	4 Gallons	32.0	224.75
● SAE 60				
STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
RD60QT	EA	1 Quart	2.1	14.85
RD60QT	CA	12 Quarts	25.2	176.45















SYNTHETIC ATV/UTV MOTOR OIL

Formulated to provide upgraded performance and protection for hardworking and performance ATVs and UTVs.

10W-40

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
AUV40QT	EA	1 Quart	2.0	13.35
AUV40QT	CA	12 Quarts	24.0	158.65

5W-50

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
AUV50QT	EA	1 Quart	2.0	14.05
AUV50QT	CA	12 Quarts	24.0	167.05



Synthetic ATV/UTV **Transmission** and Differential Fluid

Protects heavily loaded, high-torque ATV and UTV gears and bearings against wear in the most severe operating conditions.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
AUDTQT	EA	1 Quart	2.0	14.75
AUDTQT	CA	12 Quarts	24.0	175.30

Synthetic ATV/UTV Front Drive Fluid

Purpose-built for superior gear and bearing protection in Polaris* hubs and centralized Hilliard* clutches.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
AUFDQT	EA	1 Quart	2.0	14.55
AUFDQT	CA	12 Quarts	24.0	172.95





^{*}All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use. All products advertised here are developed by AMSOIL for use in the applications shown.

OUT-FRONT PERFORMANCE

SYNTHETIC DIRT BIKE OIL

Delivers confidence in clutch feel. maximum horsepower and superior wear protection in all types of four-stroke dirt bikes.

10W-40

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
DB40QT	EA	1 Quart	2.0	13.80
DB40QT	CA	12 Quarts	24.0	163.85

10W-50

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
DB50QT	EA	1 Quart	2.0	14.35
DB50QT	CA	12 Quarts	24.0	170.60

10W-60

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
DB60QT	EA	1 Quart	2.0	14.70
DB60QT	CA	12 Quarts	24.0	174.95

O Synthetic Dirt Bike **Transmission Fluid**

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
DBTFQT	EA	1 Quart	2.0	11.65
DBTFQT	CA	12 Quarts	24.0	138.00















RIDE HARD.







SYNTHETIC V-TWIN MOTORCYCLE OIL

20W-50

Superior synthetic formulation provides long service life and maximum protection against engine wear in Harley-Davidson*, Buell*, Ducati*, Aprilia*, BMW* and other motorcycle engines, primaries and transmissions.

STOCK #	UNITS	PKG ./ SIZE	WT. LBS. 2.1 25.2	cost
MCVQT	EA	1 Quart		13.35
MCVQT	CA	12 Quarts		158.30
MCV1G	EA	1 Gallon	8.0	52.25
MCV1G	CA	4 Gallons	32.0	207.30

V-Twin Oil Change Kit

Includes everything needed to perform an AMSOIL oil change on most 1999-2016 Harley-Davidson* motorcycles, including (4) quarts of 20W-50 Synthetic V-Twin Motorcycle Oil (MCV), (1) chrome Ea® Motorcycle Oil Filter (EaOM134C) and (1) O-ring.

STOCK #	UNITS	PKG./SIZE	WT. LBS.	COST
HDCK	EA	1 kit	10.0	75.15

SAE 60

Superior synthetic formulation provides long service life and maximum protection against engine wear in big-bore, air-cooled motorcycle engines, including Harley-Davidson Panhead, Shovelhead and Knucklehead.

STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
MCSQT	EA	1 Quart	2.0	14.15
MCSQT	CA	12 Quarts	24.0	168.25

20W-40

Superior synthetic formulation provides long service life and maximum protection against engine wear in Indian* and Victory* motorcycles.

STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
MVIQT	EA	1 Quart	2.1	13.00
MVIQT	CA	12 Quarts	24.9	154.30

TO ORDER – Call 1-800-956-5695, 7 a.m. to 7 p.m. Central Time, M – F Free Shipping on Orders of \$100 or More (except in Alaska and Hawaii)

RUN COOL.





Helps quiet V-twin transmission noise and enable smooth shifts.

STOCK #	UNITS	PKG./SIZE	WT. LBS.	COST
MVTQT	EA	1 Quart	2.1	15.20
MVTQT	CA	12 Quarts	25.2	180.95

Synthetic V-Twin Primary Fluid

MVP

Delivers consistent clutch feel and helps riders easily find neutral.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
MVPQT	EA	1 Quart	2.1	13.35
MVPQT	CA	12 Quarts	25.2	158.50

*All trademarked harnes and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use. All products advertised here are developed by AMSOIL for use in the applications shown.



MCT

SYNTHETIC METRIC MOTORCYCLE OIL

10W-40

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Can-Am*, Honda*, Yamaha*, Kawasaki*, Triumph*, Suzuki*, BMW* and other motorcycle engines.

STOCK# MCFQT	UNITS Ea	PKG./SIZE 1 Quart	WT. LBS. 2.1	cos t 13 10
MCFQT	CA	12 Quarts	25.2	155.70
MCF1G	EA	1 Gallon	8.0	51.40
MCF1G	CA	4 Gallons	32.0	203.90

10W-30

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Honda, Yamaha, Suzuki and Kawasaki motorcycles.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
MCTQT	EA	1 Quart	2.0	12.65
MCTQT	CA	12 Quarts	24.0	149.90



*All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use. All products advertised here are developed by AMSOIL for use in the applications shown.





Briggs & Stratton Synthetic 4T Racing Oil

Formulated by AMSOIL specifically for stock and modified small-displacement air-cooled racing engines and recommended for any four-stroke air-cooled competition engine.

STOCK #	UNITS	PKG./SIZE	WT. LBS.	COST
GBS2960	EA	1 Quart	2.1	15.95
GBS2960	CA	12 Quarts	25.2	191.56



Briggs & Stratton, the world's largest small-engine manufacturer, chose AMSOIL to formulate the motor oil it recommends to protect its most demanding racing engines. Imagine what AMSOIL can do for you.

ACCEPT NO SUBSTITUTES.



Engine Oil* SAE25W-40

Synthetic Marine Engine Oil

Formulated specifically for use in four-stroke gasoline-fueled engines used in marine applications. Certified to meet NMMA FC-W Catalyst Compatible performance specifications.

10W-30

STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
WCTQT	EA	1 Quart	2.0	11.25
WCTQT	CA	12 Quarts	24.0	133.15

10W-40

• Outboard • Inboard • InboardOutboard (I/O) • Watercraft

STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
WCFQT	EA	1 Quart	2.0	12.00
WCFQT	CA	12 Quarts	24.0	142.05

25W-40 (Synthetic Blend)

STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
WCMQT	EA	1 Quart	2.0	9.55
WCMQT	CA	12 Quarts	24.0	113.05

● HP Marine™ Synthetic 2-Stroke Oil

Prevents piston skirt scuffing, cylinder bore scuffing and ring sticking in all two-stroke outboard motors. personal watercraft and anywhere NMMA TC-W3 and API-TC oils are specified.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
HPMQT	EA	1 Quart	2.0	10.55
HPMQT	CA	12 Quarts	24.0	125.00
HPM1G	EA	1 Gallon	7.9	41.15
HPM1G	CA	4 Gallons	31.6	162.90



HPM







Outboard 100:1 Pre-Mix Synthetic 2-Stroke Oil

Contains a heavy dose of low-temperature dispersant additives that excel at reducing varnish and carbon deposit formation in water-cooled outboard motors.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
ATOBC	EA	(1) 8-oz. Bottle	0.7	5.50
ATOBC	CA	(12) 8-oz. Bottles	8.4	64.00
ATOQT	EA	` 1 Quart	2.2	14.30
ATOQT	CA	12 Quarts	26.4	169.90

PROTECTION PROPERTY OF THE PRO

Universal Synthetic Marine Gear Lube

Resists foam and retains extreme-pressure qualities, even when subjected to 10 percent water contamination, in outboard lower units, stern drives, V-drives, bow and tunnel thrusters and marine transmissions.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
AGMTB	EA	(1) 10-oz. Tube	1.2	8.00
AGMTB	CA	(6) 10-oz. Tubes	7.2	47.05
AGMQT	EA	1 Quart	2.1	12.60
AGMQT	CA	12 Quarts	25.2	149.60
AGM05	EA	(1) 5-gal. Pail	39.4	238.55



John Gillespie



Synthetic 2-Stroke Injector Oil

High-quality, cost-effective oil for the severe operating conditions of two-stroke snowmobiles and outboard motors.

UNITS	PKG./SIZE	WT. LBS.	COST
EA	1 Quart	2.0	9.30
CA	12 Quarts	24.0	109.85
EA	1 Gallon	7.9	36.40
CA	4 Gallons	31.6	143.80
	EA CA EA	EA 1 Quart CA 12 Quarts EA 1 Gallon	EA 1 Quart 2.0 CA 12 Quarts 24.0 EA 1 Gallon 7.9




● INTERCEPTOR® Synthetic 2-Stroke Oil

Prevents piston skirt scuffing, ring sticking and exhaust power valve sticking in two-stroke snowmobiles.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
AITQT	EA	1 Quart	2.1	11.70
AITQT	CA	12 Quarts	25.2	138.70
AIT1G	EA	1 Gallon	8.2	45.75
AIT1G	CA	4 Gallons	32.8	181.25

Meets the performance requirements of Polaris*, Arctic Cat* and Ski-Doo* two-stroke snowmobiles.



The piston rings
earned perfect
10 merit ratings,
demonstrating no ring
sticking and excellent
performance.

The piston skirts exhibited 0.00% scuffing, proving INTERCEPTOR's outstanding friction-reduction capabilities.

Complete results at amsoil.com/proof

Severe-Duty Dyno Results

INTERCEPTOR® Synthetic 2-Stroke Oil was installed in a 2012 Ski-Doo* Renegade X snowmobile equipped with a Rotax* E-TEC* 800R engine. Following a 50-hour severe-duty dyno session designed to simulate a full season of real-world conditions, the engine was disassembled and rated for wear and deposits by a calibrated ASTM rater. Results prove INTERCEPTOR virtually eliminated wear and deposits throughout the entire engine.

*All trademarked names are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



● DOMINATOR® Synthetic 2-Stroke Racing Oil

Delivers outstanding wear protection in highhorsepower and modified racing or trail motors, including snowmobiles, motorcycles, ATVs, personal watercraft, go-carts and outboard motors.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
TDRQT	EA	1 Quart	2.1	12.25
TDRQT	CA	12 Quarts	25.2	145.30
TDR1G	EA	1 Gallon	8.2	47.95
TDR1G	CA	4 Gallons	32.8	189.95

MAXIMUM

PERFORMANCE







TCC

Synthetic Chaincase & Gear Oil

Superior protection for enclosed chains and gears found in snowmobiles, ATVs, UTVs and general equipment.

Tim Tremblay
Team AMSOIL

Scheuring Speed Sports

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
TCCCN	EA	(1) 16-oz. Bottle	1.3	10.50
TCCCN	CA	(6) 16-oz. Bottles	7.8	62.10
TCC05	EA	(1) 5-gal. Pail	32.4	223.10



SABER® Professional Synthetic 2-Stroke Oil

Provides superior protection for handheld two-stroke equipment at any mix ratio up to 100:1, offering the ultimate in convenience

ATP	
	HASTING .
2	MSTILL.
5	YNTHETIC 2-STROKE OIL
One O	III Covers All Mix Ratios
PR	ABER
	Time CASTON CHISTON

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
ATPBC	EA	(1) 8-oz. Bottle	0.7	5.25
ATPBC	CA	(12) 8-oz. Bottles	8.4	61.05
ATPPK	EA	(1) 1.5-oz. Pillow Pack	0.1	1.75
ATPPK	CA	(48) 1.5-oz. Pillow Packs	5.1	77.15
ATPQT	EA	1 Quart	2.1	13.05
ATPQT	CA	12 Quarts	25.2	155.30
ATPBA	EA	(1) 3.5-oz. Bottle	0.4	2.90
ATPBA	CA	(12) 3.5-oz. Bottles	4.8	33.05
ATP1G	EA	1 Gallon	8.0	51.25
ATP1G	CA	4 Gallons	32.0	203.35

SABER® Ratio™ 100:1..1.3 oz.... 1 US GAL "All trademarked images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use. All products advertised here are developed by AMSOIL for use in the applications shown.



Formula 4-Stroke® Power Sports Synthetic Motor Oil

Specially formulated for four-stroke recreational motors, including ATVs and snowmobiles.

STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
AFFQT	EA	1 Quart	2.0	12.65
AFFQT	CA	12 Quarts	24.0	149.75

Synthetic Small-Engine Oil

Helps preserve engine power, reduce oil consumption and reduce maintenance in small engines used in severe service.

Riding and Push Lawnmowers • Snowblowers • Generators • Pumps • Welders • Skid-Steers • Compressors • and more

10W-30

STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
ASEQT	EA	1 Quart	2.0	9.70
ASEQT	CA	12 Quarts	24.0	114.55
ASE1G	EA	1 Gallon	8.0	37.70
ASE1G	CA	4 Gallons	33.0	149.05
ASE05	EA	(1) 5-gal. Pail	39.0	181.05

10W-40

STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
ASFQT	EA	1 Quart	2.0	9.85
ASFQT	CA	12 Quarts	24.0	116.15
ASF1G	EA	1 Gallon	8.0	38.25
ASF1G	CA	4 Gallons	32.0	151.20
ASF05	EA	(1) 5-gal. Pail	39.0	183.70

● 20W-50 Zero-Turn Synthetic Hydrostatic Transmission Fluid

Fights wear to deliver smooth control and responsive power in zero-turn hydrostatic mowers.

STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
AHFQT	EA	1 Quart	2.0	12.05
AHFQT	CA	12 Quarts	25.0	143.05
AHF1G	EA	1 Gallon	8.0	47.20
AHF1G	CA	4 Gallons	32.0	187.00
AHF05	EA	(1) 5-gal. Pail	40.0	227.80

○ Formula 4-Stroke® Synthetic Scooter Oil

Formulated specifically to meet the special needs of today's high-tech air- and water-cooled four-stroke motorized scooters.

STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
ASOQT	EA	1 Quart	2.0	9.85
ASOQT	CA	12 Quarts	24.0	116.35





Ideal for gasoline engines and pre-2007 diesel applications not equipped with diesel particulate filters (DPFs), where the extra protection of a high-zinc formula is desired.

1	0W-40

STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
AMOQT	EA	1 Quart	2.1	11.70
AMOQT	CA	12 Quarts	25.2	138.70
AMO1G	EA	1 Gallon	8.0	45.75
AMO1G	CA	4 Gallons	32.0	181.25
AMOTP	EA	(1) 2.5 Gallon	19.5	111.35
AMOTP	CA	(2) 2.5 Gallons	39.0	220.65

20W-50

STOCK#	UNITS	PKG./SIZE	WT.LBS.	COST
AROQT	EA	1 Quart	2.1	11.80
AROQT	CA	12 Quarts	25.2	140.25
ARO1G	EA	1 Gallon	8.1	46.25
ARO1G	CA	4 Gallons	32.4	183.30

Shock Therapy® Suspension Fluid

Controls friction, heat, wear, foaming and scuffing in suspension components.

Lightweight #5

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
STLQT	EA	1 Quart	1.9	13.95
STLQT	CA	12 Quarts	22.8	165.90
STL05	EA	(1) 5-gal. Pail	37.7	265.25

Use in applications that demand quick rebounds under extreme temperatures.

Medium #10

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
STMQT	EA	1 Quart	2.1	13.70
STMQT	CA	12 Quarts	25.2	162.35
STM05	FA	(1) 5-gal Pail	38 1	259 50

Use in applications that require more dampening and slower rebounds.






Signature Series Max-Duty Synthetic Diesel Oil

Use in vehicles that require API CK-4

The top tier of AMSOIL protection and performance for diesel engines. Provides 6X more engine protection than required by the Detroit Diesel DD13 Scuffing Test for Specification DFS 93K222.

544-3 0					5W-4	U			
STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST	STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
DHDQT	EA	1 Quart	2.04	11.95	DEOQT	EA	1 Quart	2.04	11.50
DHDQT	CA	12 Quarts	24.43	141.25	DEOQT	CA	12 Quarts	24.46	136.40
DHD1G	EA	1 Gallon	7.89	46.60	DE01G	EA	1 Gallon	7.90	45.00
DHD1G	CA	4 Gallons	31.58	184.65	DEO1G	CA	4 Gallons	31.62	178.15
DHDTP	ĒΑ	(1) 2.5 Gallon	19.61	113.45	DEOTP	ĒΑ	(1) 2.5 Gallon	19.64	109.45
DHDTP	CA	(2) 2.5 Gallons	39.22	224.80	DEOTP	CA	(2) 2.5 Gallons	39.27	216.90
OW-40	D				○ 15W-	40			
OW-40 STOCK#	D Units	PKG./SIZE	WT. LBS.	COST	○ 15W-4 Stock#	40 UNITS	PKG./SIZE	WT. LBS.	COST
		PKG./SIZE 1 Quart	WT. LBS. 2.02	cos t 11.60			PKG./SIZE 1 Quart	WT. LBS. 2.06	cos t 11.30
STOCK#	UNITS				STOCK#	UNITS			
STOCK# DZFQT	UNITS EA	1 Quart	2.02	11.60	STOCK# DMEQT	UNITS EA	1 Quart	2.06	11.30
STOCK# DZFQT DZFQT	UNITS EA CA	1 Quart 12 Quarts	2.02 24.20	11.60 137.10	STOCK# DMEQT DMEQT	UNITS EA CA	1 Quart 12 Quarts	2.06 24.66	11.30 134.05
STOCK# DZFQT DZFQT DZF1G	UNITS EA CA EA	1 Quart 12 Quarts 1 Gallon	2.02 24.20 7.82	11.60 137.10 45.20	STOCK# DMEQT DMEQT DME1G	UNITS EA CA EA	1 Quart 12 Quarts 1 Gallon	2.06 24.66 7.97	11.30 134.05 44.20
STOCK# DZFQT DZFQT DZF1G	UNITS EA CA EA	1 Quart 12 Quarts 1 Gallon	2.02 24.20 7.82	11.60 137.10 45.20	STOCK# DMEQT DMEQT DME1G DME1G	UNITS EA CA EA CA	1 Quart 12 Quarts 1 Gallon 4 Gallons	2.06 24.66 7.97 31.88	11.30 134.05 44.20 175.00

*All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use. All products advertised here are developed by AMSOIL for use in the applications shown.







Use in vehicles that require API CK-4

ADN

SAE 10W-30

ADP

ADO

Outstanding protection and performance for customers seeking an upgrade over conventional and other synthetic diesel oils. Provides 4X more engine protection than required by the Detroit Diesel DD13 Scuffing

1	Test for Sp	ecificatio	n DFS 93K222.		Ü
,	● 10W-3	0			
	STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
	ADNQT	EA	1 Quart	2.05	7.85
	ADNQT	CA	12 Quarts	24.56	92.55
	ADN1G	EA	1 Gallon	7.94	30.60
	ADN1G	CA	4 Gallons	31.75	120.70
	ADNTP	EA	(1) 2.5 Gallon	19.72	74.10
	ADNTP	CA	(2) 2.5 Gallons	39.44	146.10
	5W-40				
	STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
	ADOQT	EA	1 Quart	2.04	8.25
	ADOQT	CA	12 Quarts	24.44	97.30
	ADO1G	EA	1 Gallon	7.90	32.25
	ADO1G	CA	4 Gallons	31.58	127.15

● 15W-40)			
STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
ADPQT	EA	1 Quart	2.06	7.95
ADPQT	CA	12 Quarts	24.70	93.60
ADP1G	EA	1 Gallon	7.98	30.95
ADP1G	CA	4 Gallons	31.93	122.15
ADPTP	EA	(1) 2.5 Gallon	19.83	75.00
ADPTP	CA	(2) 2.5 Gallons	39.67	147.90



● Series 3000 5W-30 Synthetic **Heavy Duty Diesel Oil**

Use in vehicles that require API CI-4+

Long-service-life oil engineered for pre-2007 on- and off-road diesel applications not equipped with diesel particulate filters (DPFs).

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST 12.75
HDDQT	EA	1 Quart	2.1	
HDDQT	CA	12 Quarts	25.2	151.40
HDD1G	EA	1 Gallon	8.0	50.00
HDD1G	CA	4 Gallons	32.0	198.15
HDDTP	EA	(1) 2.5 Gallon	19.6	121.75
HDDTP	CA	(2) 2.5 Gallons	39.2	241.50
HUUHF	UA	(2) 2.3 Gallolis	39.2	241.50



● 15W-40 Synthetic Heavy Duty Diesel and Marine Oil

Use in vehicles that require API CI-4+

High 12 total base number protects against acids, soot thickening, oxidation and wear in pre-2007 on- and off-road diesel applications not equipped with diesel particulate filters (DPFs).

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
AMEQT	EA	1 Quart	2.1	10.75
AMEQT	CA	12 Quarts	25.2	127.05
AME1G	EA	1 Gallon	8.0	41.85
AME1G	CA	4 Gallons	32.0	165.65
AMETP	EA	(1) 2.5 Gallon	19.6	101.80
AMETP	CA	(2) 2.5 Gallons	39.2	201.50



10W-30/SAE 30 Synthetic Heavy Duty Diesel Oil

Use in vehicles that require API CI-4+

Exceeds both 10W-30 multi-grade and SAE 30 straight-grade viscosity requirements. Engineered for pre-2007 on- and offroad diesel applications not equipped with diesel particulate filters (DPFs).

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
ACD1G	EA	1 Gallon	8.1	41.80
ACD1G	CA	4 Gallons	32.4	165.55

Oil Analysis

AMSOIL offers oil analysis service options from Oil Analyzers Inc. By analyzing used engine oil, a qualified lab can detect mechanical problems your equipment may have developed. For more information, visit www.oaitesting.com.

STOCK#	PKG./SIZE 1 sample kit (includes two-way postage) 1 sample kit (includes UPS shipping)	WT. LBS.	cos t
KIT01		0.1	34.00
KIT02		0.1	33.90
KIT06	1 sample kit	0.1	24.60
KIT14	1 value sample kit	0.1	19.15
G1206	Oil Suction Pump w/10-ft. hose	0.1	28.90
G1571	Replacement Hose 25-ft.	0.1	9.20



Signature Series Synthetic Automatic Transmission Fluid

Provides reserve protection in fleet vehicles, heavyduty pickups, work trucks and other severe-service applications that quickly break down other lubricants.

Handle More Heat With Confidence

Standard Severe Service

AMSOIL Severe Service

RESERVE PROTECTION

Change Interval - Miles



Multi-Vehicle

STOCK #	UNITS	PKG./SIZE	WT. LBS.	COST
ATFQT	EA	1 Quart	2.0	13.75
ATFQT	CA	12 Quarts	24.0	162.95
ATF1G	EA	1 Gallon	7.9	53.85
ATF1G	CA	4 Gallons	31.6	213.60
ATFTP	EA	(1) 2.5 Gallon	19.3	131.30
ATFTP	CA	(2) 2.5 Gallons	38.6	260.55

Note: Not for use with belt- or chain-type CVT or Ford* Type F applications.



Fuel-Efficient

Provides the same benefits as AMSOIL Multi-Vehicle Synthetic Automatic Transmission Fluid in a fuel-efficient formulation engineered to exceed the requirements of GM*, Ford, Toyota* and other original equipment manufacturers (OEMs) where low-viscosity oil is required.

STOCK #	UNITS	PKG./SIZE	WT. LBS.	COST
ATLQT	EA	1 Quart	2.0	14.05
ATLQT	CA	12 Quarts	24.0	167.30
ATL1G	EA	1 Gallon	7.9	55.30
ATL1G	CA	4 Gallons	31.6	219.40
ATLTP	EA	(1) 2.5 Gallon	19.5	134.85
ATLTP	CA	(2) 2.5 Gallons	39.0	267.65

Note: Not for use with belt- or chain-type CVT or Ford Type F applications.

^{*}All trademarked names are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.





OE Synthetic Automatic Transmission Fluid

Resists wear and provides smooth shifts in passenger-car/light-truck transmissions.

Multi-Vehicle

STOCK #	UNITS	PKG./SIZE	WT. LBS.	COST
OTFQT	EA	1 Quart	2.0	9.85
OTFQT	CA	12 Quarts	24.0	116.25
OTF1G	EA	1 Gallon	7.9	38.55
OTF1G	CA	4 Gallons	31.6	152.40
OTFTP	EA	(1) 2.5 Gallon	19.3	93.60
OTFTP	CA	(2) 2.5 Gallons	38.6	185.15

Note: Not for use with belt- or chain-type CVT or Ford* Type F applications.



Fuel-Efficient

Provides the same benefits as AMSOIL OE Multi-Vehicle Synthetic Automatic Transmission Fluid in a fuel-efficient formulation engineered to exceed the requirements of GM*, Ford, Toyota* and other original equipment manufacturers (OEMs) where low-viscosity oil is required.

070011 "		51/0 /0175		
STOCK #	UNITS	PKG./SIZE	WT. LBS.	COST
OTLQT	EA	1 Quart	2.0	9.45
OTLQT	CA	12 Quarts	24.0	111.40
OTL1G	EA	1 Gallon	7.9	36.90
OTL1G	CA	4 Gallons	31.6	145.90
OTLTP	EA	(1) 2.5 Gallon	19.5	89.60
OTLTP	CA	(2) 2.5 Gallons	39.0	177.15

Note: Not for use with belt- or chain-type CVT or Ford Type F applications.



Synthetic CVT Fluid

Provides outstanding protection and performance for continuously variable transmissions (CVT) throughout original equipment manufacturer (OEM)-recommended drain intervals.

STOCK# UNITS PKG./SIZE CVTQT EA 1 Quart CVTQT CA 12 Quarts CVTTP EA (1) 2.5 Gallon CVTTP CA (2) 2.5 Gallons	WT. LBS. 2.0 24.0 19.5 39.0	14.05 166.65 133.30 264.55
---	---	-------------------------------------



100% Synthetic DCT Fluid

Designed to protect high-tech dual-clutch transmissions during the most intense, high-heat operating conditions.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
DCTQT	EA	1 Quart	2.0	23.95
DCTQT	CA	12 Quarts	24.0	285.20



Synthetic Manual Transmission and Transaxle Gear Lube

Provides improved internal component protection. Formulated with extreme-pressure additives and advanced frictional qualities that provide smooth shifts while protecting gears, bearings and seals. Non-corrosive to yellow metals.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
MTGQT	EA	1 Quart	2.0	16.80
MTGQT	CA	12 Quarts	24.0	199.90
MTG05	EA	(1) 5-gal. Pail	38.9	321.15
MTG55	EA	55-gal. Drum	434.0	3,094.75



Synthetic Synchromesh Transmission Fluid

Specifically designed to deliver smooth shifts and superior wear protection in manual transmissions and transaxles with synchronizers.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
MTFQT	EA	1 Quart	2.1	14.80
MTFQT	CA	12 Quarts	25.2	175.80
MTF05	EA	(1) 5-gal. Pail	39.2	281.60
MTF55	EA	55-gaľ. Drum	436.0	2,693.15

^{*}All trademarked names are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



Super Shift® Racing Transmission Fluid

Formulated to prevent slippage and reduce heat in highperformance, high-horsepower vehicles.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
ARTQT	EA	1 Quart	2.0	13.80
ARTQT	CA	12 Quarts	24.0	163.90



Torque-Drive® Synthetic Heavy-Duty Automatic Transmission Fluid

Premium fluid designed for use in both on- and offhighway heavy-duty equipment.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
ATD1G	EA	1 Gallon	7.8	56.90
ATD1G	CA	4 Gallons	31.2	225.90
ATDTP	EA	(1) 2.5 Gallon	19.1	138.90
ATDTP	CA	(2) 2.5 Gallons	38.2	275.75



Synthetic Tractor/Hydraulic Transmission Oil

Formulated for combinations of transmissions, hydraulic systems, final drives, power take-off systems and wet brakes in heavy-duty farm and industrial equipment as well as commercial and residential lawn tractors.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
ATHQT	EA	1 Quart	2.1	11.90
ATHQT	CA	12 Quarts	25.2	141.20
ATH05	EA	(1) 5-gal. Pail	39.0	224.75
ATH30	EA	30-gal. Drum	242.1	1,206.55
ATH55	EA	55-gal. Drum	434.2	2,114.35



Severe Gear® Synthetic EP Gear Lube

Specifically engineered for high-demand applications, including trailer towing, heavy hauling, 4x4 off-road driving, commercial use and racing.

75W-90

Top fuel efficiency and cold-temperature performance

UNITS	PKG./SIZE	WT. LBS.	COST
EA	1 Quart	2.0	16.50
CA	12 Quarts	24.0	196.00
EA (1) 5-gal. Pail	38.8	314.80
	EA CA	EA 1 Quart CA 12 Quarts	EA 1 Quart 2.0 CA 12 Quarts 24.0

75W-110

Extra viscosity protection without sacrificing fuel efficiency

STOCK# UNITS PKG./SIZE WT. LBS. COS	-
	įΙ
SVTQT EA 1 Quart 2.1 17.0	0
SVTQT CA 12 Quarts 25.2 202.5	5
SVT05 EA (1) 5-gal. Pail 40.0 325.5	0

● 75W-140

Maximum viscosity protection for severe-duty applications

UNITS	PKG./SIZE	WT. LBS.	COST
EA	1 Quart	2.1	18.15
CA	12 Quarts	25.2	215.90
EA	(1) 5-gal. Pail	39.2	347.40
	UNITS EA CA	UNITS PKG./SIZE EA 1 Quart CA 12 Quarts	EA 1 Quart 2.1 CA 12 Quarts 25.2



Easy Installation

PRODUCT	STOCK#	cos t
Hand Pump	G2039	11.50
Flexible Pour Spout	G1230	0.80
Nozzle Dispenser Caps (6)	G1242	1.30



○ Slip Lock® Differential Additive

Designed to eliminate gear-housing chatter in cars, trucks and SUVs equipped with limited-slip differentials.

Note: AMSOIL synthetic gear lubes do not require the use of this additive. However, not all differentials respond the same and if chatter is noticed, the addition of AMSOIL Slip Lock will eliminate it.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
ADATB	EA	(1) 4-oz. Tube	0.3	8.50
ADATB	CA	(12) 4-oz. Tubes	3.6	100.60



Severe Gear® EP Synthetic Racing Gear Lube

Engineered specifically for the demands of severe racing conditions, including off-road truck racing, rock racing, tractor pulling, funny car racing and dragster racing applications.

SAE 190

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
SRNQT	EA	1 Quart	2.1	18.20
SRNQT	CA	12 Quarts	25.2	217.05
SRN05	EA	(1) 5-gal. Pail	40.0	349.35

SAE 250

S PKG./SIZE	WT. LBS.	COST
1 Quart	2.1	18.20
12 Quarts	25.2	217.10
(1) 5-gal. Pail	40.0	349.40
	1 Quart 12 Quarts	1 Quart 2.1 12 Quarts 25.2



Long Life Synthetic Gear Lube

Specifically engineered for extended drain intervals up to 500,000 miles as set by equipment manufacturers for overthe-road trucks and heavy equipment.

75W-90

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
FGRQT	EA	1 Quart	2.1	14.85
FGRQT	CA	12 Quarts	25.2	176.40
FGR1G	EA	1 Gallon	8.1	58.45
FGR1G	CA	4 Gallons	32.4	232.00
FGR05	EA	(1) 5-gal. Pail	39.7	282.55

80W-140

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
FG005	EA	(1) 5-gal. Pail	40.0	281.45
FG016	EA	16-gal. Keg	135.0	860.95
FG030	EA	30-gal. Drum	249.0	1,526.45
FG055	EA	55-gal. Drum	446.0	2,684.85



● 80W-90 Synthetic Gear Lube

Excellent extreme-pressure performance and wear protection for applications specifying SAE 80W-90 conventional gear lube.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
AGLQT	EA	1 Quart	2.1	11.65
AGLQT	CA	12 Quarts	25.2	138.05
AGL1G	EA	1 Gallon	8.1	45.65
AGL1G	CA	4 Gallons	32.4	180.90
AGL05	EA	(1) 5-gal. Pail	39.8	219.60

Ea® Oil Filters

AMSOIL Ea Oil Filters rank among the highest efficiency filters available to the auto/light-truck and powersports markets, providing a filtering efficiency of 98.7 percent at 20 microns. Featuring advanced full-synthetic technology, Ea Oil Filters provide greater efficiency, capacity and durability than cellulose filters extending engine and filter life and reducing engine wear.


- Ea Filters designated with product code Ea15K are recommended for 15,000 miles/one year, whichever comes first, in normal or severe service.
- Ea Filters designated with product code EaO are recommended for 25,000 miles/one year, whichever comes first, in normal service or 15,000 miles/one year, whichever comes first, in severe service.

50/14

50/15

MSTILL

Ea 15K 13

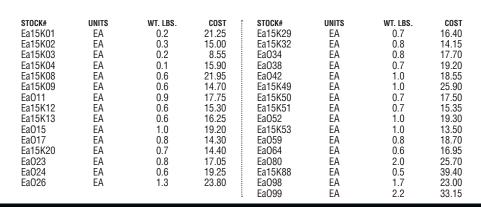

Which filter do I need?

Call 1-800-956-5695 (Monday-Friday, 7 a.m. - 7 p.m. Central Time) or contact the AMSOIL Dealer listed on the back of your catalog (if one is listed) to determine the appropriate filter for each application. When AMSOIL Ea Oil Filters are used with a motor oil other than AMSOIL motor oil the filter should be changed according to the vehicle manufacturer recommendation.

Ea Oil Filters are available to Dealers and Preferred Customers by the case. See page 3 for information on becoming a Dealer or Preferred Customer.

Fill in your vehicle information. Then call 1-800-956-5695 (Monday – Friday, 7 a.m. – 7 p.m. Central Time). You may also contact the AMSOIL Dealer listed on the back of your catalog (if one is listed) to determine your appropriate oil and air filters.						
Make	Year	Model				
Engine						
VIN						
Your AMSOIL Oil Filter is	Yo	ur WIX Oil Filter is				
Your WIX Air Filter is						

More Premium Ea® Filters

AMSOIL offers a variety of specialty Ea oil and air filters constructed with premium synthetic technology. Call (715) 399-TECH (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.



Ea Heavy-Duty Extended-Life Oil Filters

Provide excellent 98.7 percent filtering efficiency and high contaminant capacity for heavy-duty on- and off-road diesel and gasoline applications. Provide extended service intervals that coincide with the maximum drain intervals of AMSOIL synthetic motor oils.



Ea Bypass Filters

High-efficiency bypass filters effectively remove minute dirt particles and soot. Provide an efficiency rating of 98.7 percent at two microns.



Ea Universal Air Induction Filters

Fit most popular air intake systems on the market, providing improved cold air intake and excellent efficiency for superior engine protection and performance. Cleanable and remain serviceable for long filter life.



Ea Racing Air Filters

Specially designed for carbureted racing and street rod applications, providing higher dirt-holding capacity, lower pressure drop and greater airflow and efficiency. Cleanable and remain serviceable for long filter life.



Ea Pre-Filters

Constructed of woven mesh and designed to fit over the top of Ea Racing and Air Induction Filters, preventing large particles from sticking to them and blocking airflow. Easily removed and shaken free of debris in seconds. Cleanable and remain serviceable for up to one year.



Ea Motorcycle Oil Filters

Most efficient filters available for the motorcycle market. Available in black or chrome (as available).



STATISTICS OF THE PROPERTY OF



DOMINATOR® Synthetic Racing Grease

High-performance bearing and chassis lubrication for all race applications on snow, dirt, water and track.

Use in applications that require NLGI No. 2

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
GRGCR	EA	(1) 14-oz. Cartridge	1.0	14.05
GRGCR	CA	(10) 14-oz. Cartridges	10.0	135.55

Synthetic Polymeric Off-Road Grease

Extreme-pressure, moly-fortified grease that provides outstanding protection for heavy-load-bearing applications, including steering knuckles, spring shackles, heavy equipment pivot joints and other components operating in high-load, low-speed conditions.

Synthetic Polymeric Off-Road Grease

Use in applications that require NLGI No. 1

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
GPOR1CR	EA	(1) 15-oz. Cartridge	1.0	10.10
GPOR1CR	CA	(10) 15-oz. Cartridges	10.0	96.90

Synthetic Polymeric Off-Road Grease

Use in applications that require NLGI No. 2

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
GPOR2CR	EA	(1) 15-oz. Cartridge	1.0	10.50
GPOR2CR	CA	(10) 15-oz. Cartridges	10.0	100.70

Synthetic Polymeric Truck, Chassis and Equipment Grease

Delivers excellent wear protection and performance in severe-service, extreme-pressure environments such as axle assemblies, U-joints, pivot pins, fifth-wheel plates, steering linkages, kingpins, water pump bearings, ball joints and other greasable bearings and chassis components.

Synthetic Polymeric Truck, Chassis and Equipment Grease

Use in applications that require NLGI No. 1

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
GPTR1CR	EA	(1) 14-oz. Cartridge	1.0	8.40
GPTR1CR	CA	(10) 14-oz. Cartridges	10.0	80.10

Synthetic Polymeric Truck, Chassis and Equipment Grease

Use in applications that require NLGI No. 2

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
GPTR2CR	EA	(1) 14-oz. Cartridge	1.0	9.00
GPTR2CR	CA	(10) 14-oz. Cartridges	10.0	86.05



Synthetic Multi-Purpose Grease

Delivers premium wear protection and pumping capability for bearings, bushings, chassis lubrication and other applications.

Use in applications that require NLGI No. 2

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
GLCCR	EA	(1) 14-oz. Cartridge	1.0	8.40
GLCCR	CA	(10) 14-oz. Cartridges	10.0	79.80
GLC3P	EA	(3) 3-oz. Cartridges	0.6	10.65
GLC3P	CA	(30) 3-oz. Cartridges	5.6	100.25
GLCGN	EA	` Grease Gun Kit	2.0	39.85





GWR



Synthetic Water-Resistant Grease

Provides outstanding water-washout and spray-off resistance for applications frequently exposed to water, mud, snow or ice.

Use in applications that require NLGI No. 2

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
GWRCR	EA	(1) 14-oz. Cartridge	1.0	8.95
GWRCR	CA	(10) 14-oz. Cartridges	10.0	84.80
GWR3P	EA	(3) 3-oz. Cartridges	0.6	11.55
GWR3P	CA	(30) 3-oz. Cartridges	5.6	108.55



X-Treme Synthetic Food Grade Grease

Designed for high levels of protection in food and pharmaceutical industry equipment. NSF-approved formula (formerly USDA H-1) for incidental contact with food.

Use in applications that require NLGI No. 2

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
GXCCR	EA	(1) 14-oz. Cartridge	1.0	10.95
GXCCR	CA	(10) 14-oz. Cartridges	10.0	104.75



GSP





FWG

Arctic Synthetic Grease

Provides extreme low-temperature pumpability and superior protection for equipment operating in harsh climates where temperatures drop well below freezing.

Use in appli	cations that ı	equire NLGI No. 1		
STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
GECCR	EA	(1) 15-oz. Cartridge	1.0	12.60
GECCR	CA	(10) 15-oz Cartridges	10.0	118 50

Synthetic Fifth-Wheel Grease

Heavy-duty lubricant that provides outstanding protection and performance in the heavily loaded, harsh operating environments of fifth-wheel hitches used in trucking and trailer applications.

ations that re	quire NLGI No. 2		
UNITS	PKG./SIZE	WT. LBS.	COST
EA	(1) 10-oz. Tube	0.7	8.40
CA	(12) 10-oz. Tubes	8.4	99.05
	UNITS EA	UNITS PKG./SIZE EA (1) 10-oz. Tube	EA (1) 10-oz. Tube 0.7

Spray Grease

Applies quickly and evenly and is ideal for greasing hard-to-reach equipment, including hinges, springs, industrial chains, latches, slides, winches and other common applications.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
GSPSC	EA	(1) 10-oz. Spray Can	0.7	6.65
GSPSC	CA	(12) 10-oz. Spray Cans	7.5	78.60



Synthetic Air Tool Oil

Effectively lubricates rotary and piston-type air-tool bearings and motors, while managing moisture and conditioning rubber and plastic seals and O-rings.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
AIRBA	EA	(1) 4-oz. Bottle	0.4	4.45
AIRBA	CA	(12) 4-oz. Bottles	4.8	51.55



Semi-Synthetic Bar and Chain Oil

Delivers excellent lubrication and protection, helping extend the life of bar and chain applications.

STOCK# ABCQT	UNITS EA	PKG./SIZE 1 Quart	WT. LBS. 2.1	cos t 6.70
ABCQT	CA	12 Quarts	25.2	78.40
ABC1G	EA	1 Gallon	8.1	25.75
ABC1G	CA	4 Gallons	32.4	101.35
ABC05	EA	(1) 5-gal. Pail	39.2	121.60

Synthetic Compressor Oil

Superior protection for rotary screw, rotary vane, reciprocating and other compressor applications.

ISO 46, SAE 20

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
	ONLIA		WI. LDO.	
PCIQT	EA	1 Quart	2.0	13.40
PCIQT	CA	12 Quarts	24.0	158.75
PCI05	EA	(1) 5-gal. Pail	38.4	253.55

ISO 100, SAE 30/40

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
PCKQT	EA	1 Quart	2.1	14.05
PCKQT	CA	12 Quarts	25.2	166.60
PCK05	EA	(1) 5-gal. Pail	38.8	266.45



Gasoline Stabilizer

Helps prevent the formation of varnish and sludge in stored seasonal equipment such as snowmobiles, lawnmowers, motorcycles and boats.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
ASTCN	EA	(1) 16-oz. Bottle	1.1	12.30
ASTCN	CA	(6) 16-oz. Bottles	6.6	73.05




● P.i.®

Provides improved fuel mileage up to 5.7% and reduces emissions in gasoline direct-injected and port-fuel-injected engines.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
APICN	EA	(1) 12-oz. Bottle	0.9	13.45
APICN	CA	(12) 12-oz. Bottles	10.8	159.85


Two of the four dirty injectors tested were fouled >15% and another was fouled >10%. After one tank of operation on AMSOIL P.i., all injectors returned to >95% flow.






Intake valve before P.i. treatment.

Intake valve after P.i. treatment.



Injector spray pattern **before** P.i. treatment.



Injector spray pattern **after** P.i. treatment.



Addresses Ethanol-Related Performance issues

DIRECTIONS: One bottle treats up to 6 gallons for cleanup and up to 12 gallons for continued protection. For best results use with every tank.

Quickshot®

Effectively addresses performance issues related to ethanol, water and dirty pump gas in two- and four-stroke gasoline-powered engines and powersports equipment fuel systems, restoring peak performance.

Motorcycles • Snowmobiles • Boats • ATVs • Edgers • Tillers • Mowers • Snowblowers • Chainsaws • Generators • Farm & Construction Equipment • and more

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
AQSCN	EA	(1) 8-oz. Bottle	0.6	9.70
AQSCN	CA	(6) 8-oz. Bottles	3.6	57.50
AQSQT	EA	` 1 Quart	2.0	29.55
AQSQT	CA	12 Quarts	24.0	352.75



Phase separation is when ethanol/water mixtures fall to the bottom of fuel tanks and containers, leading to lean-burn conditions.

Quickshot helps keep water molecules dispersed to prevent phase separation.

Degraded fuel can present a major maintenance issue in motorcycle engines, forming varnish, gum and insoluble debris that clog carburetors, fuel injectors and fuel filters. Carbon buildup can form on the tops of pistons resulting in pre-ignition, rough idling and poor throttle response. Fuel-related problems are only expected to intensify in the coming years as the ethanol content in pump gasoline continues to increase.

AMSOIL Quickshot® (AQS) is a premium fuel additive formulated to thoroughly clean and restore peak performance in motorcycle and powersports equipment fuel systems. It also stabilizes fuel between uses and during short-term storage periods.





● DOMINATOR® Octane Boost

Improves the performance of all two- and four-stroke gasoline-fueled engines.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
AOBBE	EA	(1) 12-oz. Bottle	0.8	10.35
AOBBE	CA	(6) 12-oz. Bottles	4.8	61.15



Motorcycle Octane Boost

Increases octane up to three numbers for maximum power and efficiency in motorcycles.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
MOBCN	EA	(1) 4-oz. Bottle	0.4	5.00
MOBCN	CA	(12) 4-oz. Bottles	4.8	58.50



Diesel Recovery

Emergency diesel fuel treatment that dissolves the wax crystals that form when diesel fuel surpasses its cloud point. Keep a bottle on hand for emergencies.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
DRCCN	EA	(1) 30-oz. Bottle	2.0	15.95
DRCCN	CA	(12) 30-oz. Bottles	24.0	189.25



Diesel Cetane Boost

Raises the cetane number of diesel fuel up to seven points for maximum horsepower, increased fuel economy and easier starts in all diesel engines.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
ACBCN	EA	(1) 16-oz. Bottle	1.3	9.50
ACBCN	CA	(12) 16-oz. Bottles	15.6	112.30
ACBHG	EA	(1) 64-oz. Bottle	4.2	30.00
ACBHG	CA	(6) 64-oz. Bottles	25.2	179.35
ACB05	EA	` (1) 5-gal. Pail	43.3	265.70

UP TO 4.5%
JEL ECONOMY IMPROVEMENT





Targets traditional nozzle deposits, combustion chamber

Use this treat rate chart for the 16-oz., 64-oz. and larger package sizes of AMSOIL Diesel Injector Clean.

	ANNOCIE Dieser Injector Olean.					
rCle	CLEAN-UP	MAINTENANCE	FUEL VOLUME			
믆	2 oz.	1 oz.	5 Gal.			
흗	4 oz.	2 oz.	10 Gal.			
를 !	12 oz.	6 oz.	30 Gal.			
38	32 oz.	16 oz.	80 Gal.			
<u>.≅</u>						

Use this treat rate chart for the 8-oz. size of AMSOIL Diesel Injector Clean.

\geq	CLEAN-UP	MAINTENANCE	FUEL VOLUME	
•	2 Bottles	1 Bottle	Up to 20 Gal.	

deposits and internal diesel injector deposits found in HPCR injectors. Lubricates to reduce fuel pump and injector wear. Concentrated for rapid results, maximum horsepower and up to 4.5 percent increased fuel economy in engines with accumulated deposits.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
ADFPCN	EA	(1) 8-oz. Bottle	0.6	4.95
ADFPCN	CA	(6) 8-oz. Bottles	3.6	28.85
ADFCN	EA	(1) 16-oz. Bottle	1.2	8.70
ADFCN	CA	(12) 16-oz. Bottles	14.4	102.65
ADFHG	EA	(1) 64-oz. Bottle	4.2	27.95
ADFHG	CA	(6) 64-oz. Bottles	25.2	166.85
ADF05	EA	(1) 5-gal. Pail	40.2	241.30

ACF ENERGY DESCRIPTION DIESEL COLD FLOW Grander agent Runder agent Runde agent Runder agent Runder agent Runder agent Runder agent

Diesel Cold Flow

Effectively modifies wax crystal formation at low temperatures to depress diesel fuel pour point and improve cold-flow filtration properties.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
ACFCN	EA	(1) 16-oz. Bottle	1.2	8.20
ACFCN	CA	(12) 16-oz. Bottles	14.4	96.85
ACF05	EA	` (1) 5-gal. Pail	40.0	227.00

● Diesel Injector Clean + Cold Flow

Combines the superior deposit-removing properties of AMSOIL Diesel Injector Clean and the excellent antigelling properties of AMSOIL Diesel Cold Flow in one convenient package.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
DFCCN	EA	(1) 16-oz. Bottle	1.2	10.80
DFCCN	CA	(12) 16-oz. Bottles	14.4	128.15
DFC05	EA	` (1) 5-gal. Pail	40.0	315.65



DEC



FOG

7M5014

ENGINE

ADG

AMSOIL

HEAVY



APF



Chain Lube

Provides outstanding protection against wear and corrosion. Helps extend chain life. Does not attract dirt and does not fling off. Fast-drying.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
ACLSC	EA	(1) 11-oz. Spray Can	0.7	10.90
ACLSC	CA	(6) 11-oz. Spray Cans	4.2	64.60

Engine Fogging Oil

Helps prevent corrosion and dry starts to internal engine components found in outboard motors, lawn and garden equipment, motorcycles, snowmobiles, ATVs, motor homes and generators during storage or long periods of inactivity.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
FOGSC	EA	(1) 12-oz. Aerosol Can	0.8	9.15
FOGSC	CA	(6) 12-oz. Aerosol Cans	4.8	54.30

Power Foam®

Improves starting and performance by cleaning dirty intake systems and spark plugs, freeing sticky valves and removing gum, varnish and carbon deposits.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
APFSC	EA	(1) 18-oz. Spray Can	1.5	9.80
APFSC	CA	(12) 18-oz. Spray Cans	18.0	116.10

Heavy-Duty Degreaser

Formulated with powerful and fast-acting solvents, attacking petroleum-based grime on a molecular level to loosen its hold on metal, concrete, engines and other surfaces.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
ADGSC	EA	(1) 15-oz. Spray Can	1.5	17.85
ADGSC	CA	(12) 15-oz. Spray Cans	18.0	212.55

Silicone Spray

Perfect for lubricating or protecting rubber, nylon, plastics, upholstery, vinyl, wood, cardboard or fiberglass. Also excellent for waterproofing leather products. Hundreds of household uses.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
ALSSP	EA	(1) 10-oz. Spray Can	0.9	8.95
ALSSP	CA	(12) 10-oz. Spray Cans	10.8	106.20





Synthetic Firearm Lubricant and Protectant

Effectively lubricates and protects firearms, helping extend life and prevent blockage, jams and wear. Outstanding protection and performance in both hot and cold climates. Specifically formulated for firearms, offering superior performance over multi-purpose products.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
FLPBA	EA	(1) 4-oz. Bottle	0.4	10.05
FLPBA	CA	(12) 4-oz. Bottles	4.8	118.50

Firearm Cleaner and Protectant

Penetrates deep into hard-to-reach components, effectively cleaning fouling and powder residue from all firearm surfaces, safely protecting them for storage, reducing jamming and increasing reliability. Protects against corrosion, allowing for safe storage and preserving performance, reliability and value.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
FCPSC	EA	(1) 5-oz. Spray Can	0.3	7.20
FCPSC	CA	(12) 5-oz. Spray Cans	3.6	84.80

Metal Protector

Displaces water, lubricates and protects metal surfaces from corrosion, including hinges, squeaky mechanical objects, electrical systems and more.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
AMPSC	EA	(1) 8.75-oz. Spray Can	0.8	7.20
AMPSC	CA	(12) 8.75-oz. Spray Cans	9.6	85.05

Heavy-Duty Metal Protector

Penetrates and adheres to metal surfaces, leaving a longlasting coating that protects against the damaging effects of salt, moisture or chemical corrosion.

STUCK#	UNIIS	PKG./SIZE	WI. LBS.	COST
AMHSC	EA	(1) 15-oz. Spray Can	1.3	11.95
AMHSC	CA	(12) 15-oz. Spray Cans	15.0	141.75

Engine and Transmission Flush

Helps restore operating efficiency, increase fuel economy and reduce emissions in gasoline and diesel engines and automatic transmissions.

STOCK#	UNITS		PKG./SIZE	WT. LBS.	COST	
FLSHCN FLSHCN FLSH05		EA CA EA	(12) 10	6-oz. Bottle 6-oz. Bottles 5-gal. Pail	1.2 14.4 40.0	11.00 130.15 331.00

DOMINATOR® Coolant Boost

Helps reduce engine temperatures, increase horsepower, promote faster engine warm-up times and reduce radiator and engine corrosion in racing and passenger vehicles

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
RDCBCN	EA	(1) 16-oz. Bottle	1.0	12.40
RDCBCN	CA	(6) 16-oz. Bottles	6.0	73.80



FLSH







Propylene Glycol Antifreeze & Coolant

Combines the benefits of biodegradability, low toxicity and all-climate protection for up to 150,000 miles or 5 years, whichever comes first, in passenger cars and light trucks. Protection up to 600,000 miles, 12,000 hours or 6 years, whichever comes first, in heavy-duty applications..

STOCK #	UNITS	PKG./SIZE	WT. LBS.	COST
ANT1G	EA	1 Gallon	9.8	40.50
ANT1G	CA	4 Gallons	39.2	160.20



Passenger Car/Light Truck Antifreeze & Coolant

Engineered to exceed original equipment manufacturer (OEM) requirements for up to 150,000 miles or 5 years, whichever comes first, in passenger cars and light trucks.

STOCK #	UNITS	PKG./SIZE	WT. LBS.	COST
ANTPC1G	EA	1 Gallon	9.8	22.85
ANTPC1G	CA	4 Gallons	39.2	89.50



Heavy-Duty Antifreeze & Coolant

Provides superior heat transfer and excellent protection against corrosion, cylinder-liner cavitation, freezing and boilover. Protection up to 600,000 miles, 12,000 hours or 6 years, whichever comes first.

STOCK # ANTHD1G ANTHD1G	UNITS EA CA	PKG./SIZE 1 Gallon 4 Gallons	WT. LBS. 9.8 39.2	COST 24.40 95.70
To test freeze	protection a	and additive concentration,	order antifr	eeze test strips:
STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
G1164	EA	70 Strips	0.1	13.30
G1165	EA	6 Strips	0.1	4.95



DOT 3 & 4 Synthetic Brake Fluid

High-performance brake fluid specially designed as a multi-use product for passenger-car, light-truck and powersports applications.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
BFLVCN	EA	(1) 12-oz. Bottle	1.0	7.55
BFLVCN	CA	(12) 12-oz. Bottles	12.0	88.85

DOMINATOR DOT 4 Synthetic **Racing Brake Fluid**

High boiling point brake fluid engineered to resist brake fade and vapor lock during intense racing applications.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
BFRCN	EA	(1) 12-oz. Bottle	1.0	15.50
BFRCN	CA	(12) 12-oz. Bottles	12.0	184.75

Brake and Parts Cleaner

Professional strength parts cleaner that quickly removes oil, grease, brake fluid and other contaminants from brake parts and other automotive components.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
BPCSC	EA	(1) 19-oz. Spray Can	1.25	5.80
BPCSC	CA	(12) 19-oz. Spray Cans	15.0	67.95

Multi-Vehicle Synthetic **Power Steering Fluid**

Provides excellent wear protection, long component life and quiet operation in most passenger cars and light trucks.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
PSFCN	EA	(1) 16-oz. Bottle	1.1	8.45
PSFCN	CA	(12) 16-oz. Bottles	13.2	99.15



PSF

BPC



G2576 17.35

Aids in the removal of power steering fluid, motor oil, drivetrain lubricants and engine coolant. Can also be used to install fresh lubricants in hard-to-reach areas.



Miracle Wash® Waterless Wash & Wax

Unique dry car wash and polish delivers outstanding performance and quick, easy and economical application. No water required.

STOCK#	UNITS	PKG./SIZE	WT. LBS.	COST
AMWSC	EA	(1) 13-oz. Spray Can	1.0	10.10
AMWSC	CA	(12) 13-oz. Spray Cans	12.0	120.00

Aftermarket Partners

AMSOIL also offers premium filtration products from its aftermarket partners, including Donaldson, WIX and MANN FILTER.

For product and pricing information, call 1-800-956-5695 (Monday - Friday, 7 a.m. - 7 p.m. Central Time) or contact the AMSOIL Dealer listed on the back of your catalog (if one is listed).







The Company of FIRSTS

More than 40 Years of Innovation and Leadership

FIRST API-qualified 100 percent synthetic motor oil.

FIRST to introduce the concept of "extended drain intervals" with a recommended 25 000-mile/12-month drain interval

FIRST synthetic gear lube for automotive use.

FIRST synthetic motor oil for diesel engines.

FIRST synthetic motor oil for racing engines.

FIRST synthetic motor oil for turbocharged engines.

FIRST synthetic motor oil for marine engines.

FIRST 100:1 pre-mix synthetic 2-cycle oil.

FIRST synthetic automatic transmission fluid for automotive use





The First in Synthetics®

One AMSOIL Center Superior, WI 54880 AMSOIL INC.

WE HONOR





(Discover in U.S. only)

Your Servicing AMSOIL Dealer

and make ordering easier. Call toll-free at 1-800-956-5695. Credit card orders only. ◀ Refer to this referral number to save time

Referral # 1820978